


## Antenna Distributor AMC F Series 1000 – 3000 MHz

The AMC series is a very flexible antenna distribution solution. It is available for various frequency ranges from 10 kHz to 3.6 GHz. This version covers the frequency range from 1000 to 3000 MHz.

The devices are designed for integration into 19-inch racks. Its small footprint allows for flexible integration into the application environment.

In accordance with requirements of customers 4, 8, 12 or 16 outputs can be provided. N or SMA type output connectors are available. Further customer requirements can be considered.

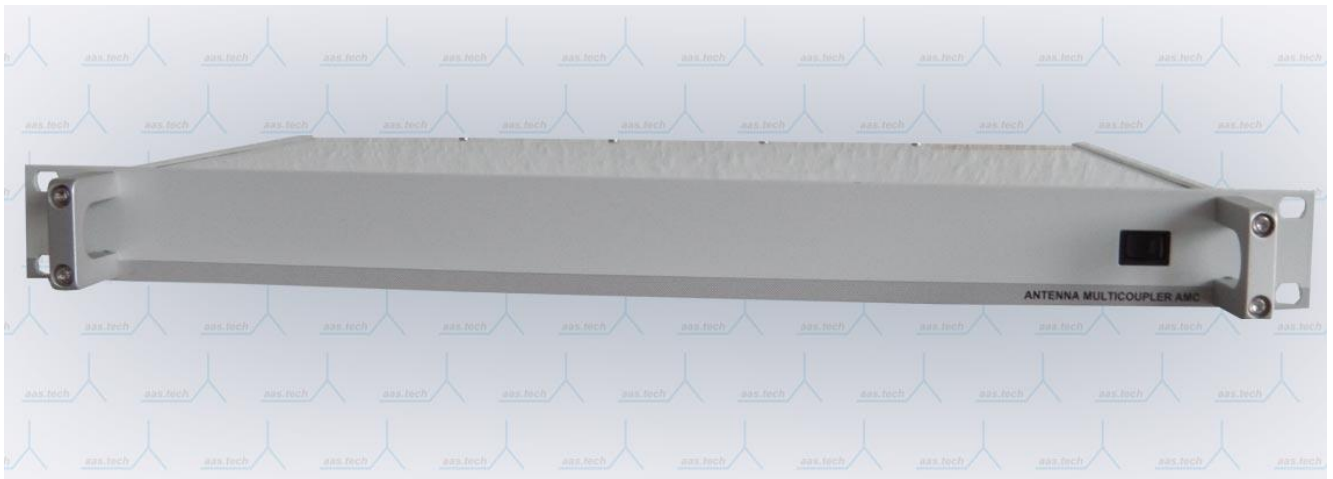

### General Data

Parameter	AMC 4	AMC 8 AMC 12 AMC 16
Dimension slide-in unit (w x h x d)	19" 1 u (44 mm) 280 mm	
Weight	3,6 kg	3,9 kg
Colour of Front Panel	RAL 7035 (light grey)	
Mains Supply	85 – 264 Vac, 48 - 60 Hz	
Power Consumption	8 VA	15 VA
Battery Supply (Option DC)	18 – 36 Vdc, max. 1 A	
Ambient Temperature	-10 ... +60°C	
Storage Temperature	-50 ... +80°C	
Relative Humidity <small>Note 1</small>	95%	


## Technical Data

Parameter	AMC 4	AMC 8 AMC 12 AMC 16
Vibration	IEC 60068-2-6	
EMC	Interference Immunity EN 61000-6-1 Interference Emissions EN 61000-6-3	
MTBF	> 60.000 h	> 45.000 h
MTTR (replacement of subunits)	0,5 h	
Frequency Range	1000 - 3000 MHz	
Number of Antenna Inputs	1 N socket	
Number of Outputs	4	8 (AMC 8) 12 (AMC 12) 16 (AMC 16)
Input Impedance	50 Ohm VSWR < 2,0	
Output Impedance	50 Ohm VSWR < 2,0	
Gain	3,0 ± 1,5 dB	2,0 ± 1,5 dB
Noise Figure	4,5 dB	5,5 dB
Intercept Point IPOP2	30 dBm	28 dBm
Intercept Point IPOP3	18 dBm	15 dBm
1 dB Compression	9 dBm	8 dBm
Maximum Signal Level (continuous wave)	20 dBm	
Input Protection (pulse)	2 kV 1,2/50 µsec	
Decoupling between two outputs	typ. 20 dB	
Decoupling between output and input	> 26 dB	> 50 dB

Note 1:  
 Relative humidity valid for the front panel, non-condensing

Data given without tolerance are typical values.  
 Design and specification are subject to change without prior notice, errors excepted.

## Views



Rear view shows version fully equipped with 16 SMA connectors

## Type Designation

<b>Variant</b>	<b>AMC NN C - F</b>
<b>NN = Number of Outputs</b>	<b>NN = 4:</b> 4 outputs <b>NN = 8:</b> 8 outputs <b>NN = 12:</b> 12 outputs <b>NN = 16:</b> 16 outputs
<b>C = Type of Output Connectors</b>	<b>C = N:</b> N connectors (max. 8 N connectors) <b>C = S:</b> SMA connectors

## Options

<b>Option</b>	<b>AMC NN C - F - Option</b>
<b>DC Option</b>	Power Supply with DC input 18 – 36 Vdc Power consumption max. 1 A
<b>Colour of Front Panel</b>	RAL .... colour code to be specified by customer